

Circuit-Lock® 30A Disconnects with LED Indicators

inSIGHT™

*Insight (n): the power or act of seeing into a situation**

Hubbell's new 30A Circuit-Lock Disconnect with integral phase indication LEDs redefines the benchmark for safety by providing insight into the enclosure while in use. Six highly visible LEDs (3 line side/3 load side) communicate the electrical status of the switch by phase. This voltage detection feature significantly improves existing safety and maintenance procedures by visually providing personnel critical information prior to removing the enclosure cover; e.g. a welded contact or dropped phase.

Hubbell inSIGHT™ phase indicating disconnect switches are available in non-metallic and stainless steel versions. Replacement covers are available for upgrades to existing installations. With an ever growing focus on safety improvements Hubbell inSIGHT™ disconnects provide a difference you literally can see.

FEATURES

- Six highly visible integral phase identification LEDs
- External LEDs provide secondary means of visual confirmation of make/break on all phases
- Cover cannot be removed with switch in the "ON" position
- Certified by NSF for hygiene in Food Processing applications
- Highly visible red handle which meets OSHA LO/TO capabilities
- Available in 30 Amp non-metallic and stainless steel versions, with or without JOG switch
- UL witnessed IP69k and UL Type 4X and 12 Environmental ratings

*Definition per www.merriam-webster.com



inSIGHT™

Verification of Opening
of Load Side Contacts



Circuit-Lock® 30A Disconnects with LED Indicators

HUBBELL®
Wiring Device-Kellems

inSIGHT™



30 Amp Unfused Disconnect Switches with LEDs

Description	Non-Metallic*	Stainless Steel Square Top	Stainless Steel Sloped Top
Disconnect switch with LEDs	HBLDS3P	HBLDS3SSP	HBLDS3SSRP
Disconnect with Jog Switch and LEDs	HBLDS3PJ	—	HBLDS3SSRPJ

LED Replacement Covers

Description	Non-Metallic*	Stainless Steel Square Top	Stainless Steel Sloped Top
Replacement cover for 30A switches with LEDs	HBLDS3RCP	HBLDS3SSRCP	HBLDS3SSRRCP

*Laser Marked

Auxiliary Contacts

Description	Catalog Number
"Break After Main Break", 1 set of n/o contacts, 1 set of n/c contacts	HBLAC1
"Break Before Main Break", 1 set of n/o contacts for use with variable frequency drives	HBLAC2

Rating Information



Water & Dust Ingress Protection:

IP69k Water Test

Extremely Hot (176°) and High Pressure Water (1450 psi) sprayed from various angles.

IP69k Dust Test

Device is placed in a dust chamber for 8 hours while a vacuum tries to pull dust into the sealed device.




National Sanitation Foundation (NSF)

Known as The Most Trusted Name in Food Safety™, NSF International has been helping businesses in the agriculture, processing, food equipment, restaurant and retail industries to navigate the food safety and regulatory environment for nearly 70 years.

© 2014 NSF International. All rights reserved.

Visit hubbell-wiring.com to see Hubbell's complete line of 30-200 Amp Disconnects

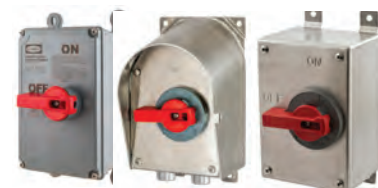

30A Labelless Disconnects
Disconnects for use with VFD



200A Disconnects



30A Labelless Disconnects
with JOG Switch

HUBBELL®
Wiring Device-Kellems

www.hubbell.ca/wiring



Hubbell Canada LP • Electrical Systems • 870 Brock Road South • Pickering, ON L1W 1Z8
Tel: (905) 839-1138 • Fax: (905) 839-9108
Printed in Canada. Specifications subject to change without notice.

H3507 06/17