

Extra Heavy Duty Industrial GFCI Receptacles



Hubbell's Exclusive Extra Heavy Duty Industrial GFR is specifically designed and built to withstand demanding applications and environments.

Factory equipment, portable generators and waste water treatment plants are just a few of the many challenging installations requiring an additional level of performance.

The industrial GFR meets these unique applications through innovative design, superior materials and a corrosion resistant robust construction.

This safety solution includes Tamper Resistant (TR) and Weather Resistant (WR) as standard construction.



Extra Heavy Duty Industrial GFCI Receptacles

Features and Benefits

- Heavy Duty robust construction; high impact resistant polyester housing, (UV) stabilized, (V0) flammability rating
- Corrosion Resistant; nickel plated face contacts, mounting strap, line/load terminals and terminal clamps; stainless steel screws
- Tamper and Weather Resistance are standard features for all Hubbell industrial ground fault receptacles
- Patented auto monitor, power denial technology, first in the industry introduced over (15) years ago
- Multiple indicators – power (green), trip ground fault (red) and end of life (flashing red)



Ordering Information

Description	Color	Industrial		Industrial Hospital Grade	
		15A	20A	15A	20A
Extra Heavy Duty Industrial Ground Fault Receptacle	Brown	GF5262SG	GF5362SG	GF8200SG	GF8300SG
20A 125V Feed Through	Black	GF5262SGBK	GF5362SGBK	GF8200SGBK	GF8300SGBK
Tamper and Weather Resistant	Gray	GF5262SGGY	GF5362SGGY	GF8200SGGY	GF8300SGGY
	Ivory	GF5262SGI	GF5362SGI	GF8200SGI	GF8300SGI
	Red	GF5262SGR	GF5362SGR	GF8200SGR	GF8300SGR
	White	GF5262SGW	GF5362SGW	GF8200SGW	GF8300SGW
	Yellow	GF5262SGYEL	GF5362SGYEL	NA	NA

Code and Standard Compliance

National Electric Code®
Compliant with NEC® 406.12 and NEC® 517-18c for Tamper Resistance
Compliant with NEC® 406.9 for Weather Resistance

Industry Standards
NEMA WD6, ANSI C-73, NOM, National Electric Code,
Canadian Electric Code

Ratings

Amperage
Feed-through
Voltage
Frequency
Dielectric
Flammability
Operating Temp
Trip Level
Short Circuit


15 Amp/20 Amp
20 Amp Protection
120V AC (- 15%, + 10%)
60 Hz
Withstand 1,500V
V0 per UL 94
(-35°C to 66°C)
(4mA to 6mA) .025 sec.
10,000 Amps

Certifications

UL Listing
UL Std 498
UL Std 943
UL Std 943
UL Std 943
NEC®/CEC®
CSA Listing
CSA Std
CSA Tech

E41978 Fed Spec Receptacle
GFCI
Dust Resistant
Corrosion Resistant
TR, WR Resistant
LR24886
C22.2 No. 42
No. M-02A

Dimensions

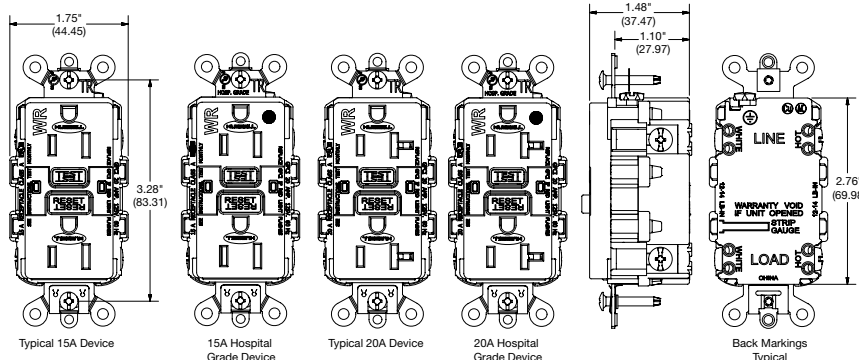

Construction

Termination
Terminal
Grounding
Power Indicator
GF/Trip Indicator
End of Life
Contacts/Bridge
Printed Circuit Board
Scored Bridge

Back and Side
#14 to # 10AWG
Autoground Clip
Solid Green
Solid Red
Flashing Red
Nickel Plated
Conformal Coat
OEM Installations

HUBBELL
Wiring Device-Kellems

www.hubbell.ca/wiring

